


COVER SYSTEM TYPE 2: HARDSCAPE ASPHALT/CONCRETE/BRICK COVER PLUS MARKER LAYER


NOT TO SCALE




COVER SYSTEMS TYPE 1 OR 2, ABUTTED TO EXISTING SLAB

GEOTEXTILE MARKER LAYER
TO BE INSTALLED AT A
MINIMUM OF 3" UP SIDE OF
EXISTING CONCRETE SLAB

COVER SYSTEM TYPE 4: COVER SYSTEMS ABUTTING EXISTING CONCRETE SLABS

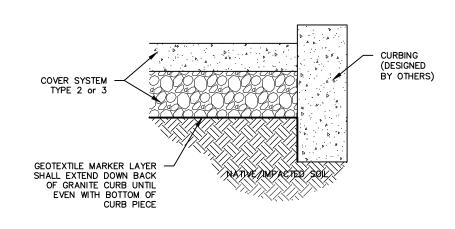

COVER SYSTEM TYPE 5: SIDEWALK ABUTTING GRANITE CURBING

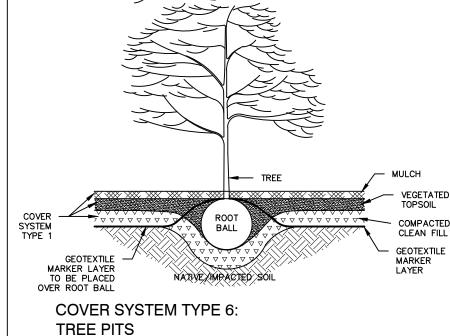

NOTES:

- 1. THE QUANTITIES IDENTIFIED ARE MINIMUM REQUIREMENTS FOR COVERING OF THE IDENTIFIED CONTAMINATED SOILS. ADDITIONAL SUB-BASE MATERIALS MAY BE REQUIRED IN AREAS PROPOSED FOR ASPHALT PAVING, BUILDINGS AND/OR CONCRETE SIDEWALKS/PATIOS, AS NECESSARY, TO MAINTAIN STRUCTURAL INTEGRITY OF THESE MATERIALS. THE SITE DESIGN ENGINEER IS REQUIRED TO MAKE THE DETERMINATION OF STRUCTURAL SUITABILITY.
- 2. GEOTEXTILE MARKER LAYER SHALL BE US65HVO DEMARCATION FABRIC OR APPROVED EQUAL.



Consulting, Inc.

PREPARED FOR:

TOWN OF CAMDEN 29 ELM STREET CAMDEN, MAINE SITE:

FORMER APOLLO TANNERY 116 WASHINGTON STREET CAMDEN, MAINE COVER SYSTEM
DETAILS

ERY DATE:
PROJECT:
FIGURE:

E: JANUARY 2021 JECT: 181.06095